

P2 GASOLINE PORTABLE MOTOPUMP (VANGUARD 37 HP)



- Kube Pump is first non-priming motopump. Kube Pumps do not need any Priming System the suction hose restarts self-suction again in couple of seconds even if it comes out of the
- All the pump parts are manufacturing in our factory, therefore there is no spare parts supplying problem.
- Multipurpose pump. In addition to firefighting Kube Pumps can operate smoothly in dirty water, flood water, oily water, sewage and seawater.
- The pump body made by two separated parts. In case of any failure it can easily unscrew the body and easily maintenance.
- Kube Pumps have two different unique protection systems to prevent damage to the pump and the engine in case of any hard metal and similar substances get in the suction hose during the operation.

- Suction at geographical 10 meters depth. Although the phrase is suction, due to the nature of our patented system pushing the water up with the help of a propeller, that means there is no loss flow rate up to 7 meters.
- Dry working capability. Working dry does not effect the operation. It won't give any damage to pump or engine.
- The pumps have corrosion-resistant series of material and long-lasting operation performance by advanced aluminum technology.
- Kube Pumps have ISO 9001, TSE, CE and EN 14466 Portable Pumps certificates.

P2 GASOLINE

	ENGINE	TYPE	4 CYCLE
		NUMBER OF CYLINDER	2 CYLINDER
		COOLING SYSTEM	AIR COOLED
		BORE X STROKE	86,00 X 78,00 (mm)
		PISTON DISPLACEMENT	993 cc
		OUTPUT	27,6 kW - 37 HP
		FUEL TYPE	Gasoline
		FUEL TANK CAPACITY	20 LT
		FUEL CONSUMPTION	6,1 LT/HR (%50 STROKE)
		FUEL SYSTEM	ELECTRONIC FUEL INJECTION
		OIL TANK CAPACITY	2,3 LT
	SUCTION	STARTING	ELECTRIC
		SUCTION SYSTEM	MECHANIC SPECIAL PATENTED
			SUCTION SYSTEM
	PUMP	PUMP TYPE	SINGLE END SUCTION
			CENTRIFUGAL PUMP
		SUCTION TYPE AND DIA	STORZ TYPE
			4" (100 mm)
		DISCHARGE TYPE AND DIA	STORZ TYPE
			2-1/2" (65 mm)
		DISCHARGE NUMBER	TWIN
		DISCHARGE VALVE	BALL VALVE
	WEIGHT	DRY WEIGHT	105 KG
		WET WEIGHT	135 KG
	DIMENSION (mm)	OVERALL LENGTHXWIDTHXHEIGHT	600 X 850 X 750





Kube Pump has unique protection system to prevent damage to the pump and the engine




No vacuum, no need priming. Pushing the water up with the propeller.



Working dry won't give any damage to pump or engine.

P2 GASOLINE MOTOPUMP PERFORMANCE CURVE

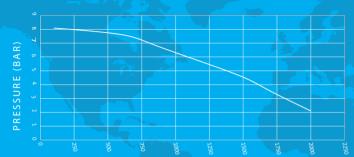

FLOWRATE (LPM)

KOZANOĞLU KOZMAKSAN



End of priming system with the innovation

Kozmaksan, exclusive sales agent of Kube Pump for Philippines, Thailand, Vietnam, Bangladesh, Singapure, S. Korea, Taiwan and all Latin American countries.

order@kozmaksan.com.tr

www.kozmaksa.net