
KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.

EATON

EAT.07.6106	Product Code
01 / 19.04.2024 / 01	Rev. Date

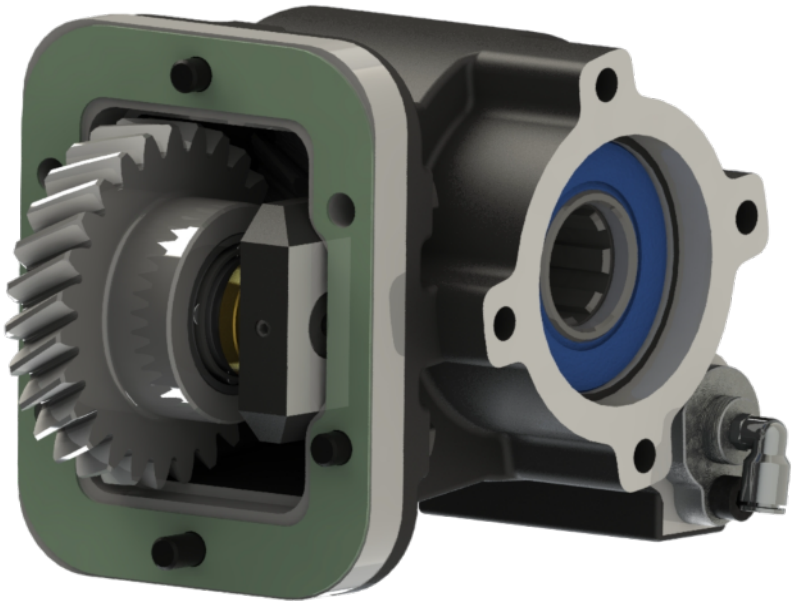

VEHICLE TYPE

BMC

TRANSMISSION CODE

ESO-6106A(6.20-0.78)

This side-mounted PTO transmission has a single two-axis output. Meeting
It is done in the main transmission. PTO gear from main transmission It transfers the movement it receives through the gears in the gearbox.
It transmits it to the output proportionally.
Equipment outlet is compatible with ISO4 Bolted pump outlet. on demand
Output can also be provided with SAE -B / BB , Keyed Shaft and Coupling.
Activation/deactivation via pneumatic control mechanism is provided. The lubrication system is provided by oil taken from the main transmission.
There is no need to add oil to the PTO afterwards.


KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.


HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.
AOS. 1. OSB. Erkunt Cad. No: 6 Sincan / ANKARA
Tel.+90 312 267 39 71-Fax +90 312 267 38 72
info@kozmaksan.com.tr
Website: www.kozmaksan.com.tr


KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.

EATON

EAT.07.6106		Product Code
01	19.04.2024	01 Rev. Date

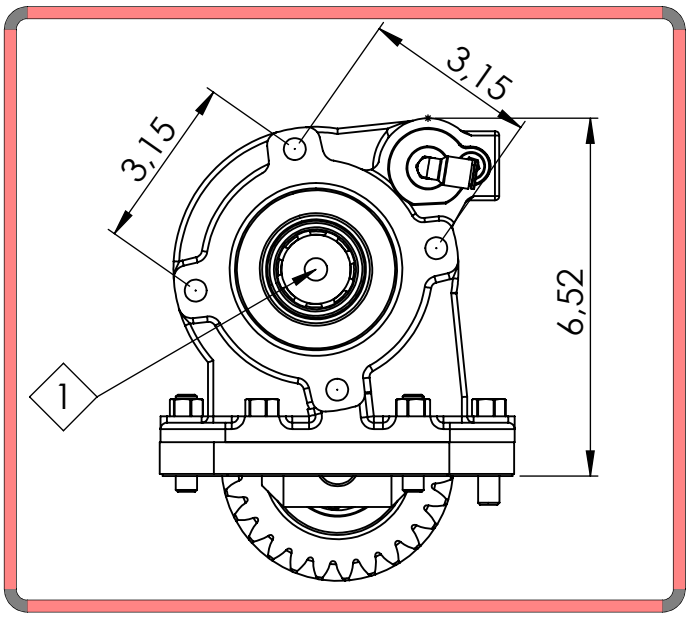

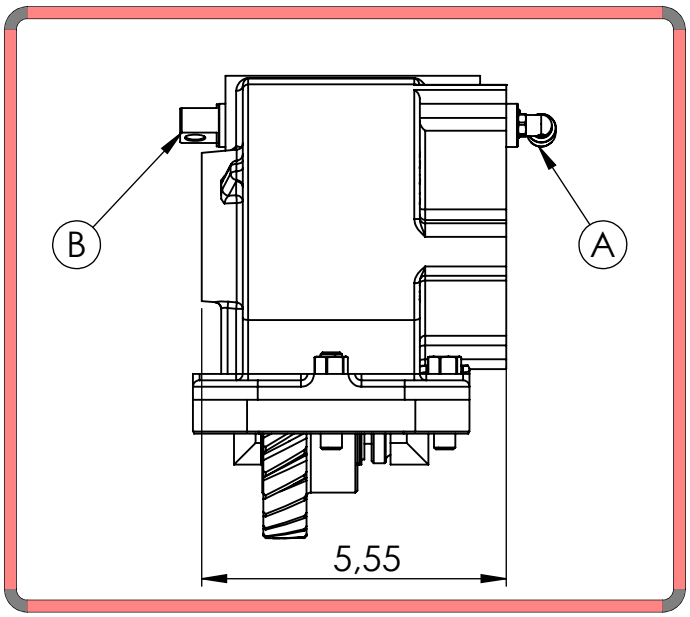

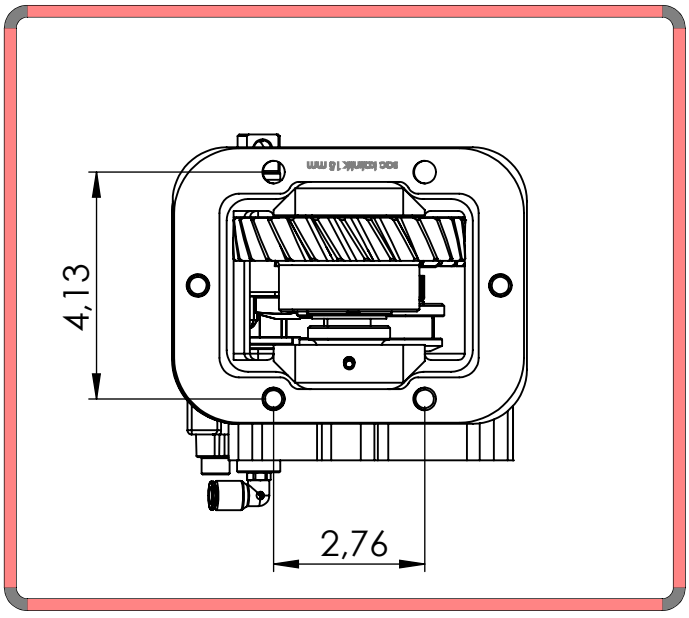

1	ISO 4 Hole (Side Mount)
A	Air Inlet
B	Mechanic Control Port

KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.

HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.
AOS. 1. OSB. Erkunt Cad. No: 6 Sincan / ANKARA
Tel.+90 312 267 39 71-Fax +90 312 267 38 72
info@kozmaksan.com.tr
Website: www.kozmaksan.com.tr

KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.

EATON

EAT.07.6106		Product Code
01	19.04.2024	01 Rev. Date


TECHNICAL VALUES			
	MAX VALUES	RATIO	WORKING RPM RANGE (MAX)
1	363 N.m / 268 lbs.ft	-	

* Output Power ; The rpm and output power may vary. Contact Kozmaksan for exact working values.

Optimum Working Temperature	25-80°C
Short-term Working Temperature	80-90°C
Risky Working Temperature	OVER 90°C

WEIGHT	12 Kg / 26,45 lbs
BODY MATERIAL	GE GJS-400-15 US 65-42-42 TR GGG-50
OIL TYPE & AMOUNT	-


Output Options




AKP.ISO.4-SAE-B.Z-13

Connection Type	ISO-->SAE-B
Kw-Nm Values	25Kw - 239Nm

Connect Type	ISO-->KEY SHAFT(1 1/4")
Kw-Nm Values	32Kw - 305Nm




KIT.ISO.KAMA



AKP.ISO.4-SAE-B-B.Z-15


Connection Type	ISO-->SAE-BB
Kw-Nm Values	27Kw - 258Nm



KIT.55.02.UF

Connection Type	ISO-->UF
Kw-Nm Values	32Kw - 305Nm

C06-045	C06-076	C06-082
ISO 7647-SAE 1300x4x10	ISO 7646-100x6x8	ISO 7647 - SAE 1100x4x8



KIT.52.01.KF

Connection Type	ISO-->KF
Kw-Nm Values	32Kw - 305Nm

KOZANOĞLU
KOZMAKSAN
HYDRAULIC PUMPS & POWER TAKE-OFFs MANUFACTURING LIMITED CO.
HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.

HİDROLİK POMPA ve ARA ŞANZIMAN PTO İMALAT SAN.LTD.ŞTİ.
AOS. 1. OSB. Erkunt Cad. No: 6 Sincan / ANKARA
Tel.+90 312 267 39 71-Fax +90 312 267 38 72
info@kozmaksan.com.tr
Website: www.kozmaksan.com.tr